




DCS TUI (Master Configuration) – Full Specification

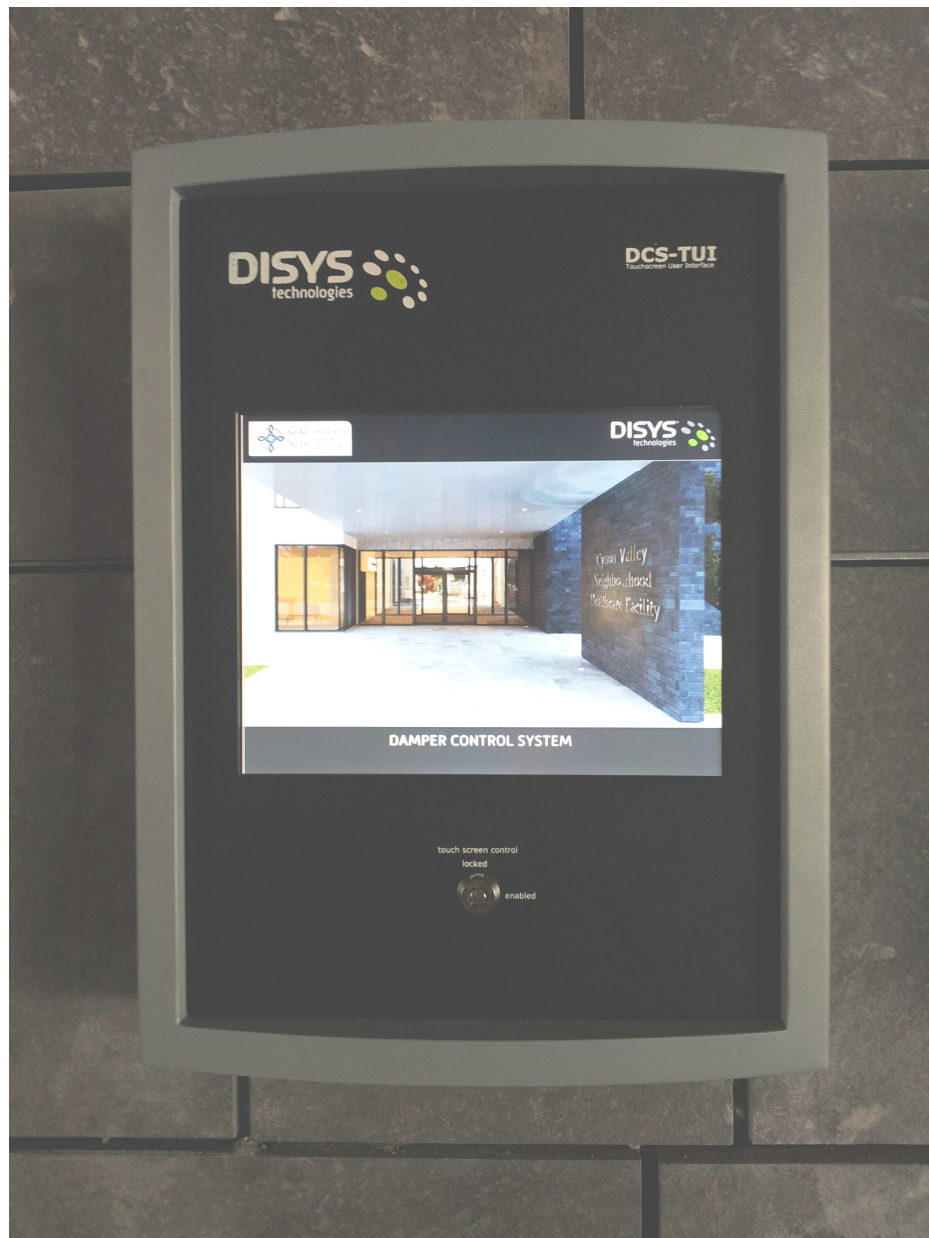

DCS TUI at Cynon Valley Neighbourhood Hospital

System Details

Comms Loops:	1(Network)
Nodes (all types) on network:	150 max.
DCS LNI per system:	20 max. (2000 dampers)
Fire alarms (zones):	255 max.
Reaction time:	<1s typ. <8s guaranteed
Override open commands:	255 max.
Override closed commands:	255 max.

Damper types:	1 normally driven open, close on fire 2 normally driven closed, open on fire 3 normally closed, drive open on fire 4 normally open, drive closed on fire
---------------	---

Status display options:	Green equals open, red equals closed or Green equals normal, red equals fire
-------------------------	---

Display options:	By loop, By zone. (CAD based graphics available at extra cost.)
------------------	--

Damper zoning:	Each damper may be in all zones OR up to 14 separate zones OR all zones except up to 14 zones.
----------------	--

Watchdogs:	LCD to system: comms lost. DINs: FAI comms lost
------------	--

Testing:	By loop, by zone,(individual optional).
----------	---

Logging: (Optional)	16k character log for alarms, faults, test results including time/date stamp.
------------------------	--

Security:	Touchscreen enable key.
-----------	-------------------------

PANEL

Physical

Dimensions:	300x400x170 WHD
Weight:	9.5kg
IP rating:	44
Materials:	Powder coated mild steel casing
Climatic:	0 to 50° C ambient 80% RH non-condensing
Colours:	Black and grey (RAL 7000)
Touchscreen:	10.2 inch diagonal 800x600 pixels, 256k colours

Electrical

Supply Voltage:	90-260V ac 47-63Hz
Power consumption:	45W
PSU approvals:	EN 60950-1 EN54-4 compliant
Battery backup:	2.3Ah internal battery. Hold up time 2 hrs.
Fusing:	Internal 1A
Inputs: NB Enable key uses one input.	12V DC 50mA to external volt free contacts – 8 off
Outputs: NB Sounder option uses one output if fitted one output dedicated to common fault	SPNO contacts – 8 off Resistive load: 230V ac @ 5A 30V dc @ 5A Inductive load: 230V ac @ 2A 30V dc @ 2A

DCS LNI (Loop Network Integrator)

Ports

Comms Loops:	1
Network Connection:	1
Nodes (all types) per loop:	150 max.
Dampers (DIN 12's) per loop:	100 max.

Enclosure:	TBA
------------	-----

Electrical

Supply Voltage:	90-260V ac 47-63Hz
Power consumption:	45W
PSU approvals:	EN 60950-1 EN54-4 compliant
Optional Battery backup:	2.3Ah internal battery. Hold up time 2 hrs.
Fusing:	Internal 1A